


PLAN

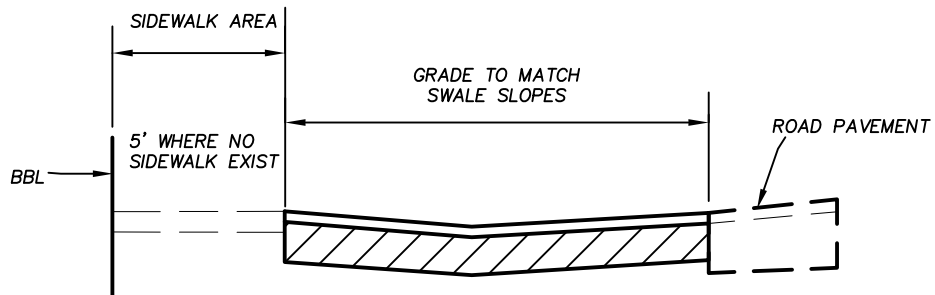

SECTION

1. SURFACE SHALL BE 1" ASPHALTIC CONCRETE WITH 6" LIMEROCK BASE
2. ALL CONSTRUCTION SHALL CONFORM TO STANDARDS AND SPECIFICATIONS OF THE PUBLIC WORK DEPARTMENT

TYPICAL TRASH PAD ASPHALTIC CONCRETE


N.T.S.

May, 2014


DR: MA
CK: LJH

DEPARTMENT OF PUBLIC WORKS
CITY OF MIAMI, FLORIDA

BULLETIN No. 48
Sheet 1 of 2

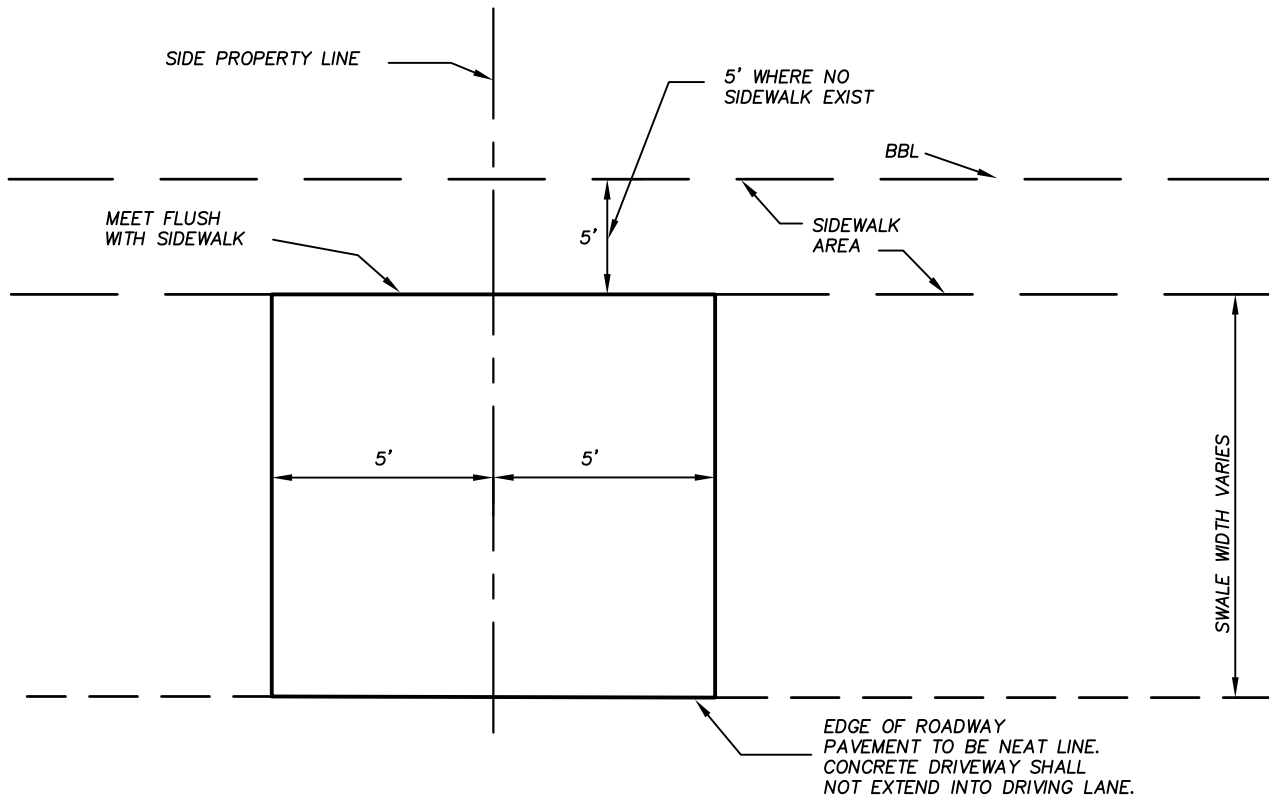

PLAN

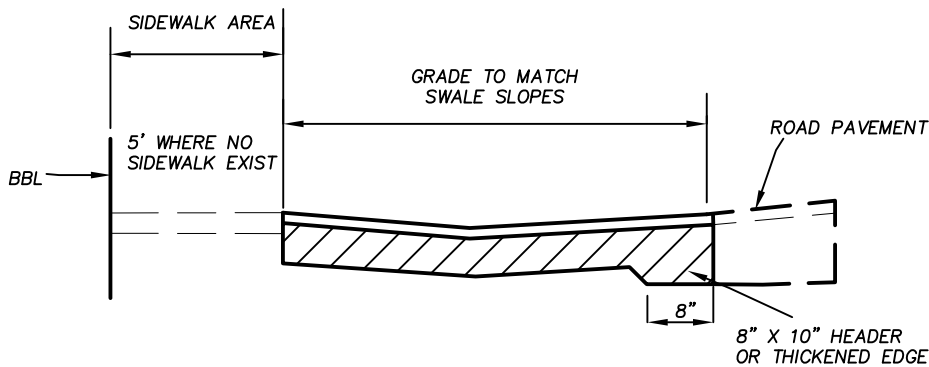

SECTION

1. TRASH PAD WITHIN THE RIGHT OF WAY AREA SHALL BE UNREINFORCED, HAVE A MINIMUM THICKNESS OF 6 INCHES AND A MINIMUM STRENGTH OF 3000 P.S.I. AT 28 DAYS
2. CONSTRUCTION AND CONTRACTION JOINTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH REQUIREMENTS OF THE CITY'S "STANDARD CONTRACT DOCUMENTS AND SPECIFICATIONS", AS AMMENDED
3. ALL CONSTRUCTION SHALL CONFORM TO STANDARDS AND SPECIFICATIONS OF THE PUBLIC WORKS DEPARTMENT

TYPICAL TRASH PAD PORTLAND CEMENT CONCRETE

N.T.S.

May, 2014

DR: MA
CK: LJH

DEPARTMENT OF PUBLIC WORKS
CITY OF MIAMI, FLORIDA

BULLETIN No. 48
Sheet 2 of 2